

Channels available for up to 4 microphones*

* When two of this product are used at the same time



● Back




● Side



- ① Noise mute switch
- ② Channel switch
- ③ Output control switch

▶ Dimensions

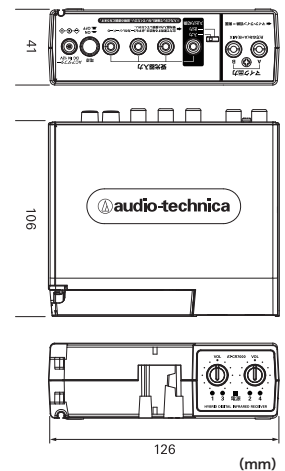

Infrared Wireless Receiver

AT-CR7000(US)

- High performance in a compact body
- Clear sound quality produced with digital processing
- Using high-performance light receiving elements, this product features a reduced number of receiver unit installations and a low profile

· This product must be used in combination with an Audio-Technica infrared wireless microphone (sold separately). Visit our web site for information on compatible models.

⇒ https://www.audio-technica.co.jp/amz/manual_en/index.html

· When sharing a receiver unit with two receivers, you must use a dedicated cascade cable (sold separately).

▶ Specifications

Channels	2 (up to 4 channels when 2 receivers are used)
Reception frequencies	1 ch (2.06 MHz), 2 ch (2.56 MHz), 3 ch (3.20 MHz), 4 ch (3.70 MHz)
Output level	Microphone: -45 dBV (VOL MAX), Line: -30 dBV (VOL MAX)
Power supply	12 V DC, 500 mA (use the included AC adapter)
Power consumption	Approx. 4.0 W (when 4 receiver units are connected)
Dimensions	41 (H) × 126 (W) × 106 (D) mm
Weight	Approx. 260 g
Accessories	AC adapter (AD-SA1205AA) Connection cable (RCA pin plug - 6.3 mm dia. monaural standard plug (L-shaped), 3.0 m) × 2

The product is subject to modification without notice for product improvement.