


**Using high-performance light receiving elements, this product features a reduced number of receiver unit installations and a low profile**



►Dimensions

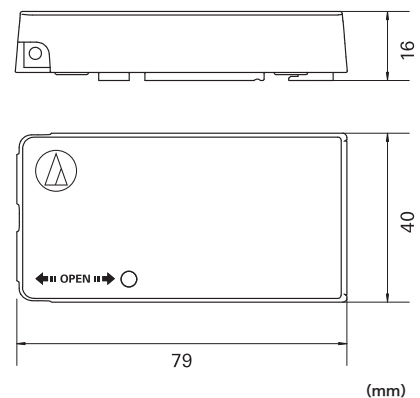

Receiver Unit

## AT-SRX(US)

■Supports up to 8 channels (2 MHz band and 3 MHz band)

\* This product must be used in combination with an Audio-Technica infrared wireless microphone (sold separately) and an Audio-Technica infrared wireless receiver (sold separately). Visit our web site for information on compatible models.

⇒[https://www.audio-technica.co.jp/amz/manual\\_en/index.html](https://www.audio-technica.co.jp/amz/manual_en/index.html)

►Specifications

Reception frequencies	1 ch (2.06 MHz), 2 ch (2.56 MHz), 3 ch (3.20 MHz), 4 ch (3.70 MHz), 5 ch (2.34 MHz), 6 ch (2.84 MHz), 7 ch (2.98 MHz), 8 ch (3.48 MHz)
Dimensions	40 (H) × 79 (W) × 16 (D) mm
Cable length	20 m
Weight	Approx. 35 g (excluding cable)
Accessories	Wood screw × 2 Receiver unit mounting fitting